

DKM-SX17M

Rackmount LCD Monitor Keyboard Pull-out Drawer

All-in-one LCD monitor, keyboard and mouse.

Pull-out rack mount drawer design uses only 1U rack space.

17" SXGA resolution @ 1280 x 1024 pixels.

Built-in speakers and audio input jack. Modular detachable AC adapter power supply.

Front bezel control buttons for display adjustment.

25" to 36" extension mounting brackets.



The DKM series of integrated LCD-KeyBoard-Mouse is a rack-mountable pull-out drawer that occupies only 1 rack unit space. Using a flip-up flat panel monitor design, the DKM series offers a low profile rack shelf to store three frequently used peripheral devices of a typical data center or server management environment—monitor, keyboard and mouse.

The pull-out shelf is mounted on slide rails so you can easily pull the unit out of your equipment rack. The LCD monitor flips up for use and folds down for storage. A tethered optical mouse offers greater point-and-click precision over touchpad pointing device. The keyboard drawer has a mouse pad and a storage compartment for the mouse.

The unit's power supply is an externally attached AC/DC adapter on the back of the unit. The adapter can be easily detached in the event that it needs to be replaced.

The DKM-SX17 has a 17" SXGA high resolution screen. The LCD's lower power consumption and EMI free technology makes it ideal for industrial applications. And with its native resolution of 1280 x 1024 pixels, you can work more and scroll less, because you can put more information on screen instead of cluttering it with menus and tool bars. An on-screen display (OSD) menu using four front-panel-mounted control buttons let's you adjust the display for optimum viewing.

The entire unit is constructed of metal for ruggedness. With the ball-bearing slide rails that can be extended from 25 " up to 30", it will accomodate the deepest equipment racks.

DKM-SX17M Rackmount LCD Monitor Keyboard Pull-out Drawer

LCD Specifications

LCD TYPE	Active matrix TFT LCD. 17-inch screen (measured diagonally).
RESOLUTION	1280 x 1024 pixels (SXGA resolution).
COLORS	24-bit color depth (16 million colors).
COLOR GAMUT (%NTSC)	n/a
PIXEL PITCH (mm)	0.264 x 0.264
ACTIVE AREA (mm/in)	337.92 x 270.34 (13.30 x 10.64)
CONTRAST RATIO	350:1
BRIGHTNESS (cd/m ²)	300
RESPONSE TIME	30ms (sum of Trise and Tfall)
VIEW ANGLES (u/d/l/r)	65/60/75/75
INTERFACE	LVDS
BACKLIGHT TYPE	Edge lighting type , 2 dual CCFL (cold cathode flourescent lamp) tubes.
INPUT SIGNAL	Analog RGB, VGA ~ SXGA
VERTICAL SYNC	60 ~ 75Hz
HORIZONTAL SYNC	64~79.97KHz
AC INPUT	85 to 264 VAC autosensing AC adpater power supply.
OSD CONTROLS	Front panel OSD menu controls for contrast, brightness, position.

Electrical, Mechanical Specifications

CONSTRUCTION	1U rack unit. Mounting brackets extension from 25" to 36" via rear extension bracket.
INPUT DEVICE	Integrated notebook style keyboard and mouse. Mouse pad and mouse storage compartment included.
KEYBOARD	Notebook style, 12 function keys. Integrated mouse pad and mouse storage.
KEYSWITCH	Short travel membrane keys.
POINTING DEVICE	Optical mouse.
EXTERNAL CONNECTORS	D-Sub 15-pin VGA connector, 3.5mm stereo jack, mini-DIN 6-pin keyboard and mouse sockets.
POWER CONSUMPTION	n/a
DIMENSIONS	19" (W) x 1.75" (H) x 25" (D)
WEIGHT	30 lbs.
OPERATING TEMP	32 ~122 degrees F operating temperature.
STORAGE TEMP	-40 ~158 degrees F storage temperature.
RELATIVE HUMIDITY	10% ~ 90% non-condensing.


Environmental Specifications

OPERATING TEMP	32 ~122 degrees F operating temperature.
STORAGE TEMP	-40 ~158 degrees F storage temperature.
RELATIVE HUMIDITY	10% ~ 90% non-condensing.

DKM-SX17M Rackmount LCD Monitor Keyboard Pull-out Drawer



1. Speakers.
2. Mouse connector (mini-DIN 6-pin).
3. On-screen menu system for display adjustments.
4. Optical mouse and mouse pad.

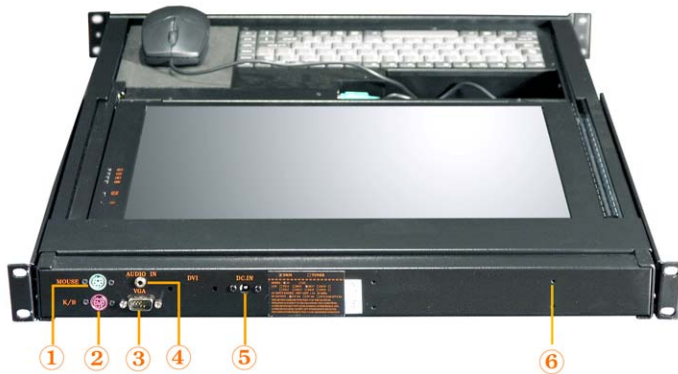

1. Keyboard socket.DC input socket .
2. Mouse socket.
3. 15-pin VGA socket.
4. Audio-in (3.5mm stereo jack).
5. DC input.
6. AC adapter mounting holes.

