

DKM-SX19M

Rackmount LCD Monitor Keyboard Pull-out Drawer



All-in-one LCD monitor, keyboard and mouse.

Pull-out rack mount drawer design uses only 2U rack space.

19" SXGA resolution @ 1280 x 1024 pixels. 700:1 contrast ratio.

DVI input. Built-in speakers and audio input jack. Modular detachable AC adapter power supply.

Front bezel control buttons for display adjustment.

16.4" to 30" extension mounting brackets.

The DKM-SX19M integrated LCD-Keybaord-Mouse is a rack-mountable unit that occupies only 2 rack unit space. Using a flip-up flat panel monitor design, the DKM-SX19M offers a low profile enclosure to store three frequently used peripheral devices of a typical data center or server management environment—monitor, keyboard and mouse.

The enclosure is mounted on slide rails so you can easily pull the unit out of your equipment rack. The LCD monitor flips up for use and folds down for storage. The unit's power supply is an externally attached AC/DC adapter on the back of the enclosure. The adapter can be easily detached in the event that it needs to be replaced.

The DKM-SX19M has a large 19" SXGA high resolution screen so more information can be displayed on-screen. With its wide viewing angles (170 degrees both vertical and horizontal), 700:1 contrast ratio (a level approaching that of CRT monitors), you'll be able to distinguish the subtle shades of color or gray in your graphics images. Lower power consumption and EMI free technology makes it ideal for industrial applications. An on-screen display (OSD) menu using four front-panel-mounted control buttons let's you adjust the display for optimum viewing.

Instead of using a notebook style touchpad, the DKM-SX19M comes with an optical mouse. A convenient storage compartment and a mouse pad are integrated in the keyboard drawer. Now you can take advantage of a high resolution mouse for high precision point and click navigation.



DKM-SX19M Rackmount LCD Monitor Keyboard Pull-out Drawer

LCD Specifications

LCD TYPE	Active matrix TFT LCD. 19-inch screen (measured diagonally).
RESOLUTION	1280 x 1024 pixels (SXGA resolution).
COLORS	24-bit color depth (16 million colors).
COLOR GAMUT (%NTSC)	n/a
PIXEL PITCH (mm)	0.294 x 0.294
ACTIVE AREA (mm/in)	376.32 x 301.056 (14.8 x 11.85)
CONTRAST RATIO	700:1
BRIGHTNESS (cd/m ²)	250
RESPONSE TIME	15ms (Ton), 10ms (Toff)
VIEW ANGLES (u/d/l/r)	85/85/85/85
INTERFACE	LVDS
BACKLIGHT TYPE	Edge light backlighting, 4 CCFL (cold cathode fluorescent lamp) tubes.
INPUT SIGNAL	Analog RGB, VGA ~ SXGA
VERTICAL SYNC	56 ~ 77Hz
HORIZONTAL SYNC	64KHz
AC INPUT	85 to 264 VAC autosensing AC adapter power supply.
OSD CONTROLS	Front panel OSD menu controls for contrast, brightness, position.

Electrical, Mechanical Specifications

CONSTRUCTION	2U rack unit. Mounting brackets extension from 16.36" to 30.18" via rear extension bracket.
INPUT DEVICE	LCD keyboard mouse.
KEYBOARD	Full size, 105-key, 12 function keys, 17-key numeric keypad. Integrated mouse pad and mouse storage.
KEYSWITCH	Short travel membrane keys.
POINTING DEVICE	Optical mouse.
EXTERNAL CONNECTORS	D-Sub 15-pin VGA connector, DVI input connector, mini-DIN 6-pin keyboard and mouse sockets.
POWER CONSUMPTION	40W
DIMENSIONS	19" (W) x 1.75" (H) x 19.125" (D)
WEIGHT	35 lbs.
OPERATING TEMP	32 ~122 degrees F operating temperature.
STORAGE TEMP	-40 ~158 degrees F storage temperature.
RELATIVE HUMIDITY	10% ~ 90% non-condensing.


Environmental Specifications

OPERATING TEMP	32 ~122 degrees F operating temperature.
STORAGE TEMP	-40 ~158 degrees F storage temperature.
RELATIVE HUMIDITY	10% ~ 90% non-condensing.

DKM-SX19M Rackmount LCD Monitor Keyboard Pull-out Drawer



1. Mouse storage.
2. Optical mouse.
3. Mouse pad.
4. On-screen menu control buttons.

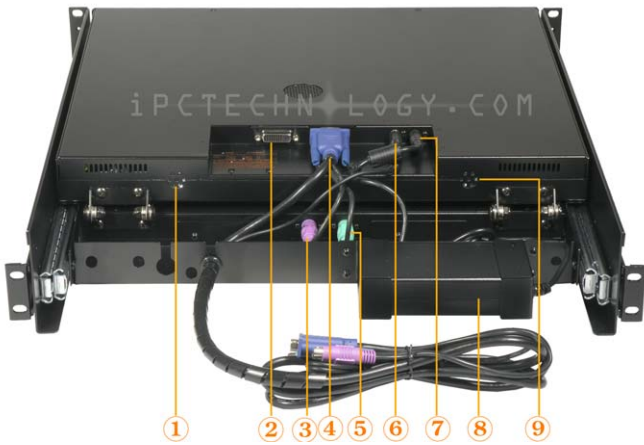

1. Right speaker.
2. DVI input.
3. Keyboard connector.
4. 15-pin VGA socket.
5. Mouse connector.
6. Audio-in connector.
7. DC power-in.
8. AC adapter power supply.
9. Left speaker.

